

**WB100** is a unique water based epoxy designed to control vapor and moisture on concrete and has excellent bond to Novacrylic surface systems. Novapoxy reduces the passage of water vapor on concrete slabs and will improve the adhesion of acrylic coatings to concrete.

Novapoxy Advantages:

Low Voc < 1 g/l and no odor for indoor and outdoor use


Water based for easy clean up

High Moisture tolerance

Compatible with all Novacrylic surface systems

Does not support mold

Easy to Install

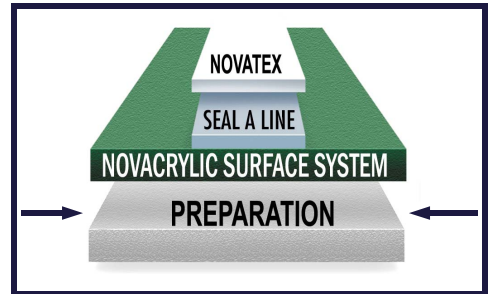

**NEW CONCRETE MUST:**

- Have vapor barrier under the slab
- Have medium broom finish
- Contain no curing agents
- Cured for 28 days
- Rh below 80% via ASTM F2170-11

<b>DILUTION</b>	MIX PART "A" WITH PART "B" MIX WELL FOR 3 MINUTES
<b>SPREADING RATE</b>	$\frac{1}{10} \text{ gal} \approx \text{sq. ft. per gallon using floor roller}$ $\frac{1}{15} \text{ gal} \approx \text{sq. ft. per gallon using trowel}$
<b>COLOR POT LIFE</b>	BLACK 60 MINUTES @ 75F / 24C
<b>PACKAGED QUANTITY</b>	2.5 gallon KIT
<b>WEIGHT</b>	13.0 lbs per gallon
<p><b>Minimum Application Temperature is 50°F and rising.</b>  <b>Application is with either roller, Neoprene rubber squeegee, or spray.</b>  <b>Novapoxy is not hazardous* and is free of lead, mercury, asbestos and formaldehyde.</b></p>	

\*\*The first coat of acrylic must be applied to the Novapoxy within 72 hours.

\* According to standards in place at the time this document was created, this product is rated non-hazardous



PROTECT FROM HEAT



DO NOT FREEZE

