


WB100 is a unique water based epoxy designed to control vapor and moisture on concrete and has excellent bond to Novacrylic surface systems. Novapoxy reduces the passage of water vapor on concrete slabs and will improve the adhesion of acrylic coatings to concrete.

Novapoxy Advantages:

- Low Voc < 1 g/l and no odor for indoor and outdoor use
- Water based for easy clean up
- High Moisture tolerance
- Compatible with all Novacrylic surface systems
- Does not support mold
- Easy to Install

NEW CONCRETE MUST:

- Have vapor barrier under the slab
- Have medium broom finish
- Contain no curing agents
- Cured for 28 days
- Be etched with phosphoric acid wash and cleaned well

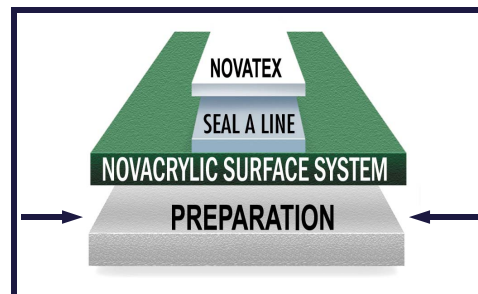

DILUTION	MIX PART "A" WITH PART "B" MIX WELL FOR 3 MINUTES
SPREADING RATE	$\frac{1}{10} \text{ gal} \approx \text{sq. ft. per gallon using floor roller}$ $\frac{1}{15} \text{ gal} \approx \text{sq. ft. per gallon using spray}$
COLOR POT LIFE	BLACK 60 MINUTES @ 75F / 24C
PACKAGED QUANTITY	2.5 gallon KIT
WEIGHT	13.0 lbs per gallon
<p>Minimum Application Temperature is 50°F and rising. Application is with either roller, Neoprene rubber squeegee, or spray. Novapoxy is not hazardous* and is free of lead, mercury, asbestos and formaldehyde.</p>	

**The first coat of acrylic must be applied to the Novapoxy within 72 hours.

* According to standards in place at the time this document was created, this product is rated non-hazardous



PROTECT FROM HEAT



DO NOT FREEZE

