


NOVAPLAY FOR PICKLEBALL is a high performance color coating system designed for Pickleball and was tested to wear fifty percent longer than a standard tennis court surface. The appearance of Novaplay for Pickleball is very similar to that of a tennis court surface, however, it is formulated with a tougher acrylic emulsion so as to be able to stand up to the more demanding needs of the Pickleball sport.

This textured, non-skid, heavy duty surface coating is ideally suited for use on Pickleball courts for either an asphalt base or concrete base. The Non angular sand used in the formulation makes for a non skid coating surface. The Balls will last longer and the colors are vibrant will stay vibrant for may years of enjoyment.

Novaplay for Pickleball is available in all the standard Novacrylic colors. We recommend two coats of undiluted Novaplay for Pickleball for maximum performance and best appearance.

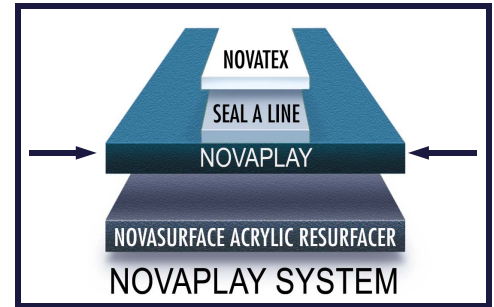

DILUTION	Use NOVAPLAY FOR PICKLEBALL undiluted
SPREADING RATE	0.064 - 0.069 gallons per sq. yd., per coat 130 - 140 sq. ft. per gallon per coat
COLOR	Black, Blue, Burgundy, Red, Classic Green, Grass Green, Nova Green, Sand Dune, Terra Cotta
PACKAGED QUANTITY	5 gallon pail or 30 gallon drum
WEIGHT	9.45 lbs per gallon
<p>Minimum Application Temperature is 50°F and rising. Application is with a neoprene rubber squeegee as described on page 7. NOVAPLAY is not hazardous* and is free of lead, mercury, asbestos and formaldehyde.</p>	

* According to standards in place at the time this document was created, this product is rated non-hazardous



PROTECT FROM HEAT



DO NOT FREEZE

