


**NOVACRYLIC COMBINATION SURFACE** is a factory mixed blend of Novacoat and Novafil supplied in a concentrated form so that only water need be added prior to application on asphalt or Portland cement tennis courts. This product is used both for new and recoat work.

**NOVA SPORTS USA** began manufacturing this product upon request from contractors who wanted a blend of texture and topcoat, which would require only the addition of water at the jobsite. Now the only decision to be made by the technicians doing the applications is: "How much water do I add?". In actual practice, using NOVACRYLIC COMBINATION SURFACE makes ordering and shipping materials to the jobsite much simpler. The main concern becomes: how many courts, how many coats and what color is specified.

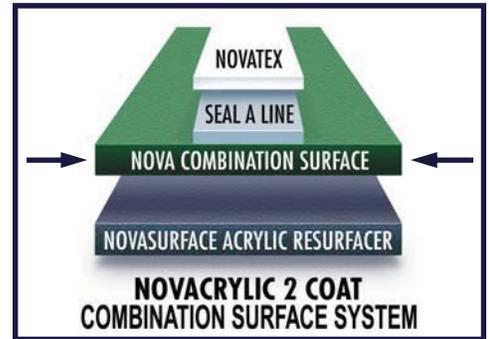

NOVACRYLIC COMBINATION SURFACE makes applications simpler. Contractors achieve better looking courts than they were getting using other materials **and** they were doing it at no more material cost! In some cases, lower labor costs and less loss through wasted materials. Almost without exception, every contractor who has tried "Combo" has converted to this system.

This coating has a non-slip texture with a unique low abrasive feature that makes playing on a Novacrylic surface easier on players and tennis balls. Because the aggregates used in this product are non-angular, the sharp edges found in ordinary sand are not present. This allows us to produce maximum texture with minimum abrasion. The reduction in abrasion means that the playing surfaces will not be "sticky". A surface having these features is more comfortable and less tiresome than other acrylics to play on. Injuries such as shin-splints and "monkey muscle" problems are lessened and tennis balls and shoes last longer.

<b>DILUTION</b>	Minimum of 15-Gal water up to 21-Gal water to 30-Gal of Combination coating
<b>COLORS</b>	Blue, Burgundy, Classic Green, Grass Green, Grey, Novagreen, Red, Sand Dune, Stadium Blue, Terra Cotta
<b>TYPICAL APPLICATION</b>	2 or 3 coats Combination surface
<b>RECOATING</b>	2 Coats Combination surface
<b>NEW WORK</b>	(optional) 1 coat Novasurface acrylic resurfacer 2 or 3 coats Combination surface
<b>SPREADING RATE</b>	0.047 - 0.056 gallons per sq. yd., per coat 160 - 190 sq. ft. per gallon, per coat 1 court (60' x 120') requires 80-100 gallons for two coats
<b>PACKAGED QUANTITY</b>	5 gallon pail, 30 gallon drum, 275 gallon tote
<p><b>Minimum Application Temperature is 50°F and rising.</b>  <b>Application is with a neoprene rubber squeegee as described on page 7.</b>  <b>Novacrylic Combination Surface is not hazardous* and is free of lead, mercury, asbestos and formaldehyde.</b></p>	

\* According to standards in place at the time this document was created, this product is rated non-hazardous



PROTECT FROM HEAT



DO NOT FREEZE

